
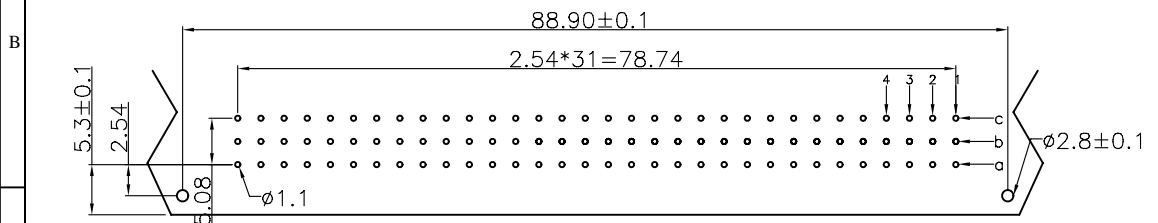

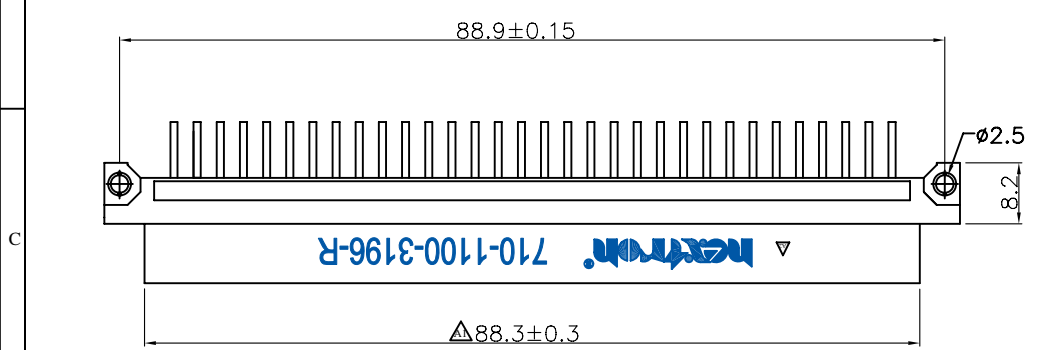


SIGN	DATE	DESCRIPTION	APPROVER
▲	180322	Engineering drawing No. is changed.	Jacky
▲	190626	Add NEXTRON logo and part No.	Jacky Liu

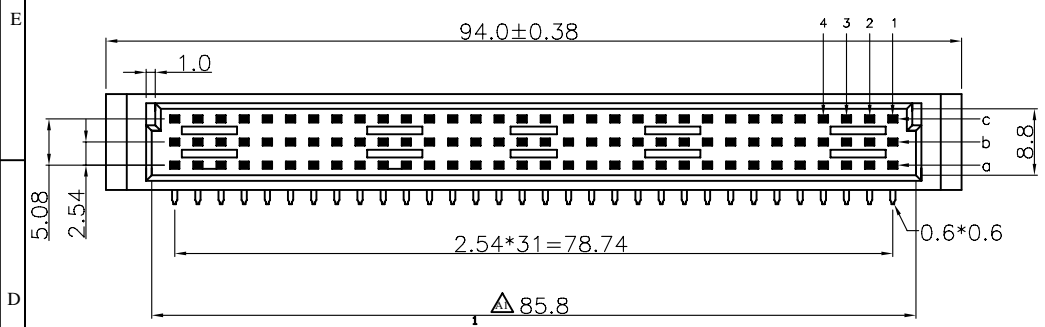

P.C.B Board Layout (Top Side)
(PCB Tolerance ±0.05)

Material:
Housing: PBT+30%GF, PBT UL94V-0
Color: Beige
Contacts: Brass.

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage:
1000V for 1 minute.
Insulator Resistance:
1000MΩ min. at DC 500V.
Contact Resistance:
30mΩ max. at DC 100mA.
Operating Temperature:
-55°C ~ +105°C.

Ordering Information

Terminal Row	Housing Type	Contact Plated	Dist ¹⁾ & PIN deficiency	Number of Pin	PIN Type	Position Harpoon	Marking
Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition
1 3 Rows	1 Male	1 Gold 1u'	31 (Dist 3.2mm Angle Right)	32 32 Pins	S Straight	Blank No harpoon	Blank No marking
2 2 Rows	3 Female	2 Gold 3u'		48 48 Pins	R Right Angle	N With harpoon	0 No marking
				64 64 Pins			
				96 96 Pins			

JHJM 深圳市君灏精密工业有限公司
SHENZHEN JUNHAO ENGINEERING CO.,LTD

PART. NAME: 396弯针欧式插座				TITLE: DIN41612/396弯针/有字			
PART. NO.: 710-1100-3196-R				DWG NAME: C-710-1100-3196-001			
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:			
			Jacky	Tolerance			
			2019.06.26	UNITS: mm	x.	±0.30	
				SCALE:	x.x	±0.20	
				REVISION: A2	x.xx	±0.10	
					xx'	±1'	