
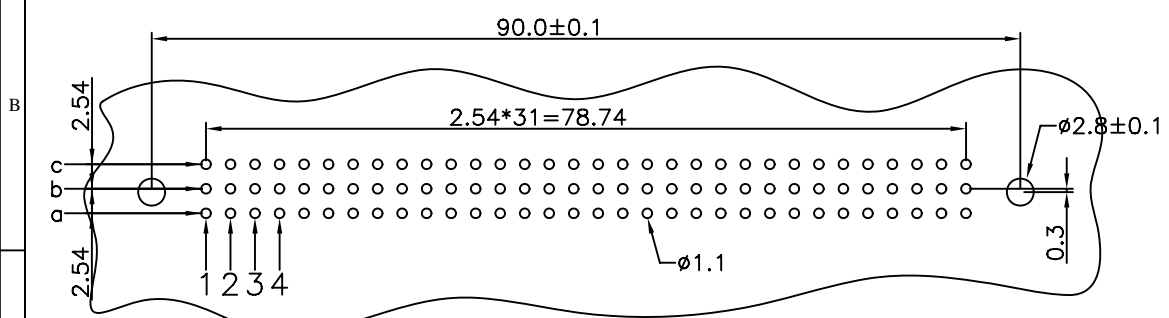
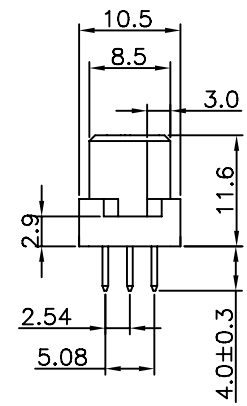
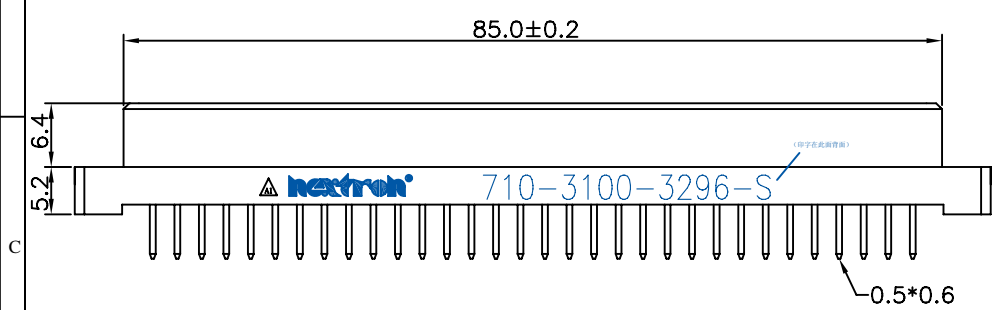


SIGN	DATE	DESCRIPTION	APPROVER
▲	190725	Add part No. and NEXTRON logo	Jacky Liu

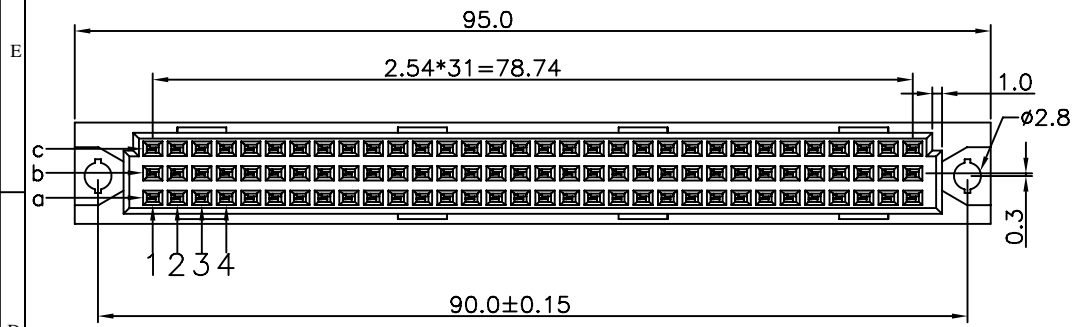

P.C.B Board Layout (Top Side)  
(PCB Tolerance ±0.05)

Material:  
Housing: 30% Glass filled  
PBT UL94V-0  
Contacts: Brass.

Electrical Characteristics:  
Current Rating: 2 AMP.  
Dielectric Withstanding  
Voltage: 1000V for 1 minute.  
Insulator Resistance:  
1000MΩ min. at DC 500V.  
Contact Resistance:  
30mΩ max. at DC 100mA.  
Operating Temperature:  
-55°C ~ +105°C.

### Ordering Information

Terminal Row	Housing Type	Contact Plated	Dim 'D' & PIN deficiency	Number of Pin	PIN Type	Position Harpoon	Marking
Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition
1 3 Rows	1 Male	1 Gold 1u'	32 Dip+0mm Straight female	64 64 Pins	S Straight	Blank No harpoon	Blank No marking
2 2 Rows	3 Female	2 Gold 3u'	96 96 Pins	R Right Angle	N With harpoon	0 No marking	

**JHJM** 深圳市君灏精密工业有限公司  
SHENZHEN JUNHAO ENGINEERING CO.,LTD

PART. NAME:	396直孔欧式插座	TITLE:	DIN41612/396直孔/有字
PART. NO.:	710-3100-3296-S	DWG NAME:	C-710-3100-3296-001
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
			Jacky 2019.07.25
CUSTOM NO.:		Tolerance	
		x. ±0.30	
		x.x ±0.20	
		x.xx ±0.10	
		xx' ±1'	