
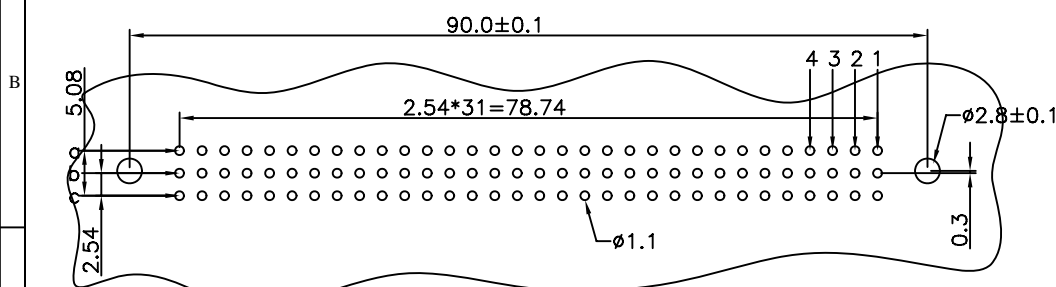
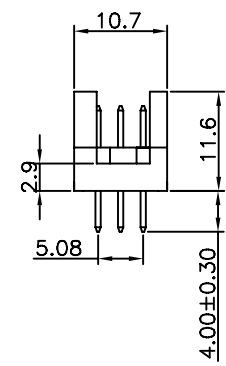
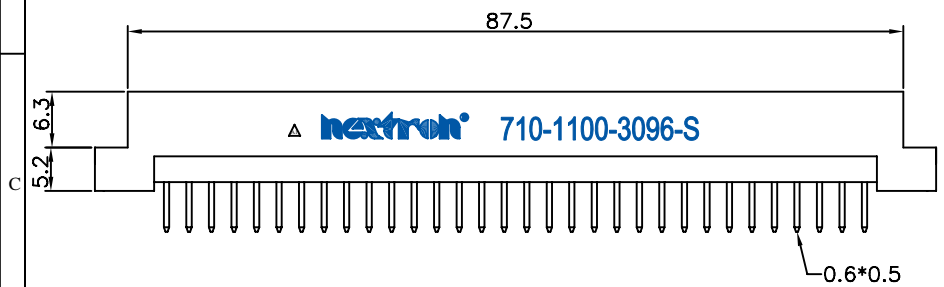


SIGN	DATE	DESCRIPTION	APPROVER
Δ	180322	Engineering drawing No. is changed.	Jacky

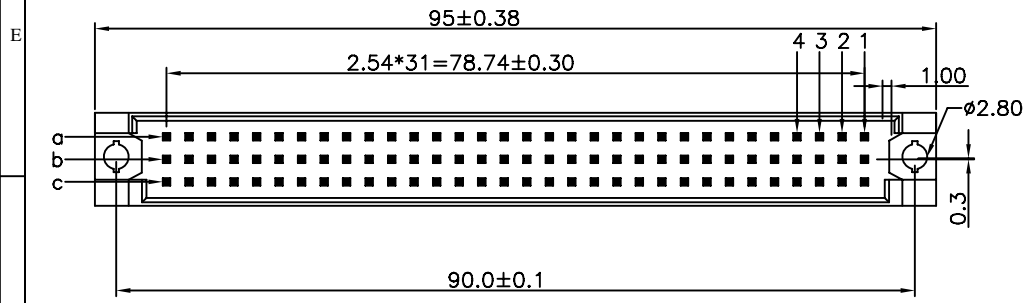

P.C.Board Layout

Material:  
Housing:30%Glass filled PBT UL94V-0  
Contacts:Brass.

Electrical Characteristics:  
Current Rating:2 AMP.  
Dielectric Withstanding Voltage:  
1000V for 1 minute.  
Insulator Resistance:  
1000MΩ min. at DC 500V.  
Contact Resistance:  
30mΩ max. at DC 100mA.  
Operating Temperature:  
-55°C~+105°C.

### Ordering Information

Terminal Row	Housing Type	Contact Plated	Dim'D' & PIN deficiency	Number of Pin	PIN Type	Position Harpoon	Marking
Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition
1 3 Rows	1 Male	1 Gold 1u"	30 Dig=4.0mm Straight Male	32 32 Pins	S Straight	Blank No harpoon	Blank No marking
2 2 Rows	3 Female	2 Gold 3u"		48 48 Pins	R Right Angle	N With harpoon	0 No marking
				64 64 Pins			
				96 96 Pins			

**JHJM** 深圳市君灏精密工业有限公司  
SHENZHEN JUNHAO ENGINEERING CO.,LTD

PART. NAME: 396直针欧式插座				TITLE: DIN41612/396直针/有字			
PART. NO.: 710-1100-3096-S				DWG NAME: C-710-1100-3096-001			
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:			
Jonnson	Jeff	allan	Jacky	Tolerance			
2018.03.22				UNITS: mm ±0.50			
				SCALE: x.xx ±0.30			
				REVISION:A1 xx' ±1'			