


37P	54.84	63.50	69.32	7.90	12.50
25P	38.38	47.04	53.04	7.90	12.50
15P	24.66	33.32	39.14	7.90	12.50
9P	16.33	24.99	30.81	7.90	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				

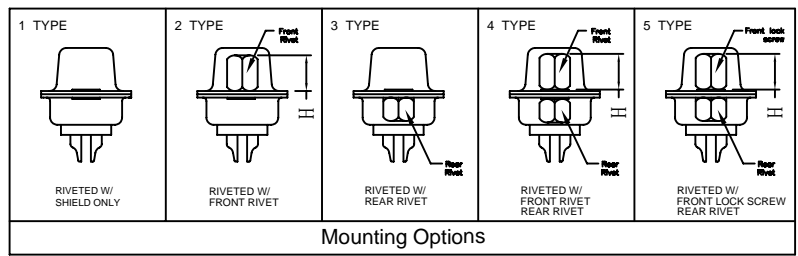

SIGN	DATE	DESCRIPTION	APPROVER
▲	20150723	Engineering drawing is changed.	Jacky
▲	20190123	Engineering drawing is changed.	Jacky Liu
▲	201209	Engineering drawing is changed.	Jacky Liu

SPECIFICATIONS:

Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:1000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH

Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy Nickel Undercoated
 Selective Gold Plated
 Finish:Metal Iron With Tin Plated

Ordering Information

SUB		DBXF		XXXX			XXX		Mark						
Number of contacts	Housing Type	Mounting Options		Nut post height	Contacts Material	Contact Plated	Insulator material	Insulator color	Mark						
Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition	Code	Definition				
A	9 PIN	0	NO ACCESSORY	0	H=5.8mm	2	Brass	1	Full Gold 1u'	0	PBT	0	Black	0	NONE
B	15 PIN	1	RIVETED W/ SHIELD ONLY	1	H=4.8mm	7	Phosphor bronze	7	Full Light Tin	2	NYLON	6	Blue	2	Nextron
C	25 PIN	2	RIVETED W/ FRONT RIVET					A	Gold 1u'/Light Tin						
E	37 PIN	3	RIVETED W/ REAR RIVET					B	Gold 3u'/Light Tin						
		4	RIVETED W/ FRONT RIVET REAR RIVET					C	Gold 5u'/Light Tin						
								E	Gold 15u'/Light Tin						

深圳市君灏精密工业有限公司
 ShenZhen JunHao Exactitude Industry CO.,LTD

PART. NAME: D型XX芯焊线式焊接插座(孔)				TITLE: D-SUB/DB/xxP/FEMALE	
PART. NO.: SEE TABLE				DWG NAME: C-SUB-DB0F-0001	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
Jonsson	Jeff	allan	Jacky 2020.12.09		x. ±0.50
				UNITS: mm	x.x ±0.30
				SCALE:	x.xx ±0.20
				REVISION:A3	xx° ±1°