

有字产品logo在此面


REV.	ECN NO.	APPD	DATE
A0	RELEASE	cheng	10/28'08
A1	Increase in 18P	cheng	11/30'09
A2	图画更新	niezhenqi	04/20'17

SPECIFICATIONS:

Current rating:1.0A AC,DC  
 Voltage rating:250V AC,DC MAX  
 Contact resistance:20m Ω MAX  
 Insulation resistance:500M Ω MIN  
 Withstanding voltage:500V AC/minute  
 Temperature range:-25°C to +105°C

MATERIAL:

Insulator:PBT UL94V-0  
 Contact:Brass.  
 Finish:Au Plated/Ni.

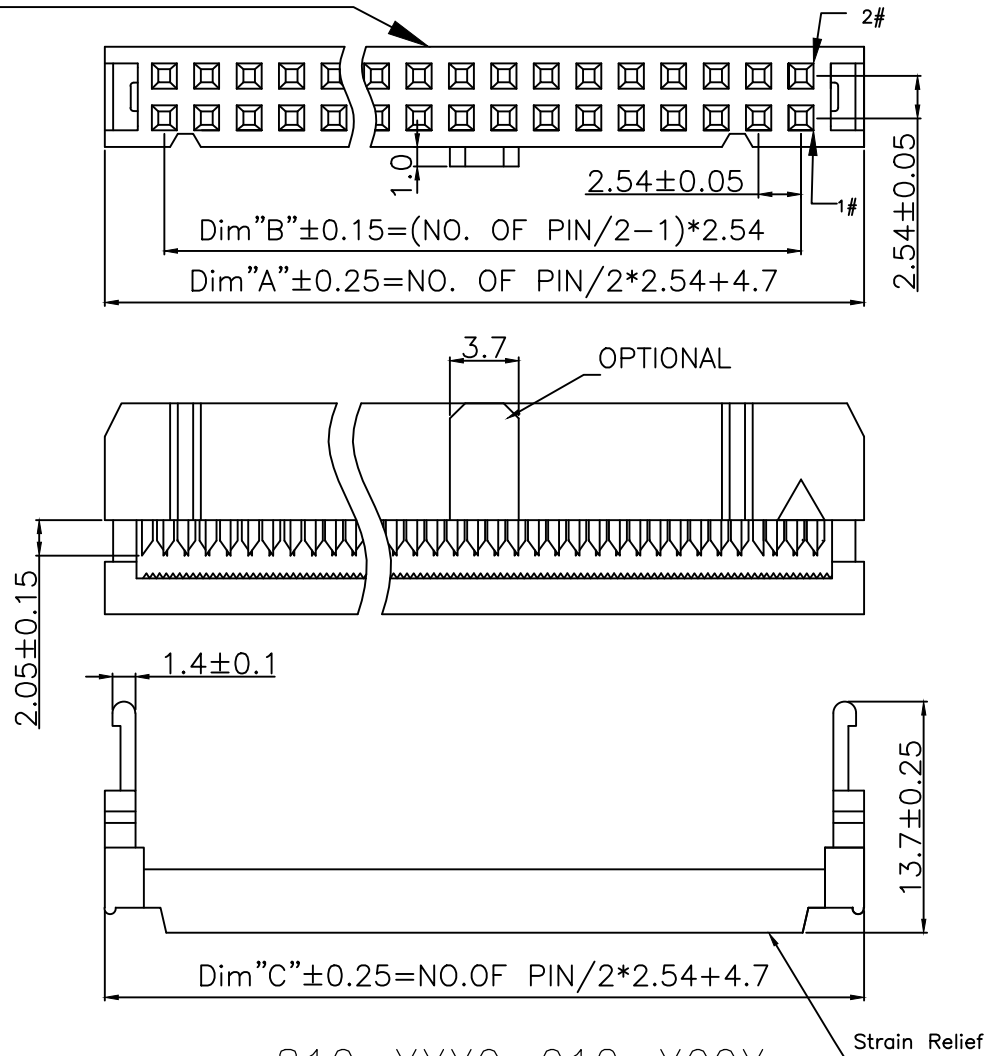

PIN	A±0.25	B±0.15	C±0.25
8	14.86	7.62	14.86
10	17.40	10.16	17.40
14	22.48	15.24	22.48
16	25.02	17.78	25.02
18	27.56	20.32	27.56
20	30.10	22.86	30.10
24	35.18	27.94	35.18
26	37.72	30.48	37.72
30	42.80	35.56	42.80
34	47.88	40.64	47.88
40	55.50	48.26	55.50
50	68.20	60.96	68.20
60	80.90	73.66	80.90
64	85.98	78.74	85.98

810-XXX0-012-X00X

Number of Positions  
8~64

Plating  
 1: AuG/F/Ni  
 5: Au5U"/Ni  
 6: Au15U"/Ni

Insulator color  
 1: Black  
 4: Grey

Marks  
 0: Nextron  
 1: None

Relief type  
 1: W/O Strain Relief  
 2: W/Strain Relief

X ±0.5	UNITS	MM	NAME:	2.54mm IDC CONNECTOR
.X ±0.38	MAT'L	SEE TABLE	PART NO.:	
.XX ±0.25			APPD: JEFF	04/20'17
.XXX ±0.08	FINISH	SEE TABLE	CHKD: JEFF	04/20'17
.X* ±2*			DR: niezhenqi	04/20'17

深圳市君灏精密工业有限公司  
 SHENZHEN JUNHAO ENGINEERING CO., LTD

TITLE:  
2.54mm IDC CONNECTOR

DWG NO.:  
EP-C-810-0010-0011

SCALE	SHEET	REV.
1:1	1/1	A2

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JUNHAO ENGINEERING CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JUNHAO ENGINEERING CO.,LTD.