
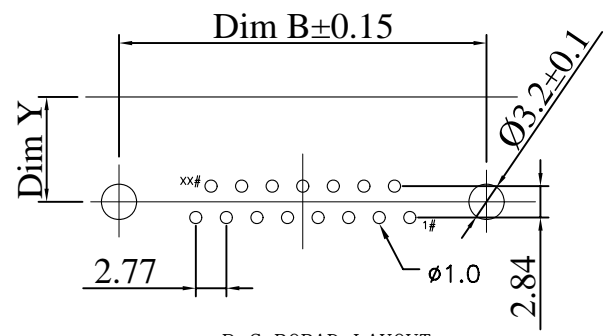
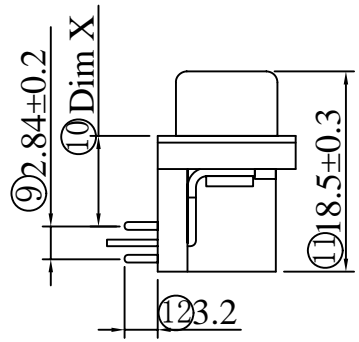
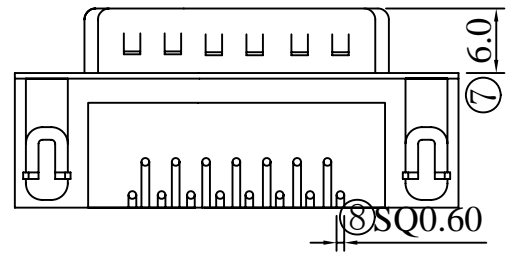
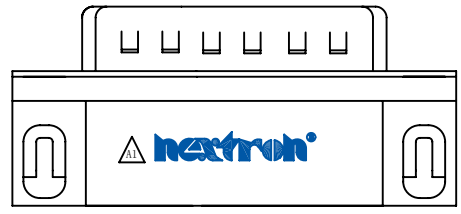


SIGN	DATE	DESCRIPTION	APPROVER
▲	20180120	Engineering drawing is changed.	Jacky
▲	20190123	Add nut post height and	Jacky Liu

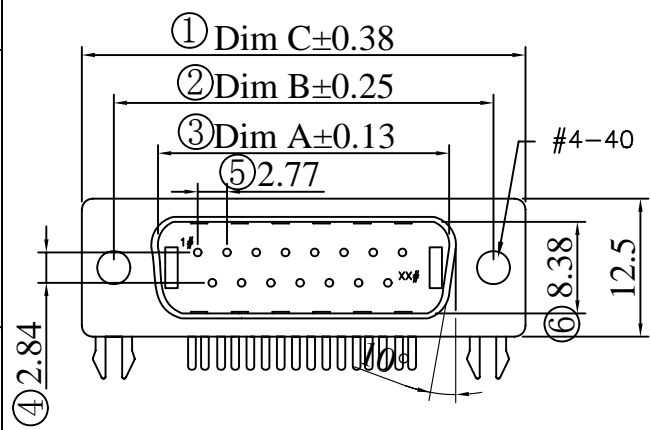

P. C. BOARD LAYOUT

37P	55.42	63.50	69.32	8.08	9.50
25P	38.96	47.04	53.04	8.08	9.50
15P	25.25	33.32	39.14	8.08	9.50
9P	16.92	24.99	30.81	8.08	9.50
POS. NO.	A	B	C	X	Y

DIMENSION

SPECIFICATIONS:


- Current rating:3.0A AC/DC
- Voltage rating:250V AC/DC
- Contact resistance:30m ohm MAX
- Insulation resistance:1000M ohm MIN
- Withstanding voltage:1000V AC for one minute
- Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH

- Insulator:PBT+30%G.F(UL94V-0)
- Contact:Copper Alloy Nickel Undercoated
- Selective Gold Plated
- Finish:Metal Iron With Tin Plated

Ordering Information

SUB		DR		X		M		XXXX		XXXX	
Number of contacts	Housing Type	Mounting Options		Nut post height	Contacts Material	Contact Plated	Insulator material	Insulator color	Mark		
Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	Code Definition	
A 9 PIN	M Male	6 SCREWED HEX SCREW ON BOARD LOCK	0 H=5.8mm L=12.8mm	2 Brass	A Gold 1u"/Light Tin	0 PBT	0 Black	0 NONE			
B 15 PIN	F Female	7 RIVETED W/ BOARD LOCK/WASHER	1 H=4.8mm L=11.8mm	7 Phosphor bronze	B Gold 3u"/Light Tin	2 NYLON	6 Blue	2 Nextron			
C 25 PIN		8 RIVETED W/BOARD LOCK/WASHER/HEX SCREW			C Gold 5u"/Light Tin		9 White				
E 37 PIN		9 RIVETED W/ BOARD LOCK/WASHER/ ATTACHED HEX SCREW			E Gold 15u"/Light Tin						
		C SCREWED HEX SCREW DIRECT RIVETING NUT LOCK			F Gold 30u"/Light Tin						

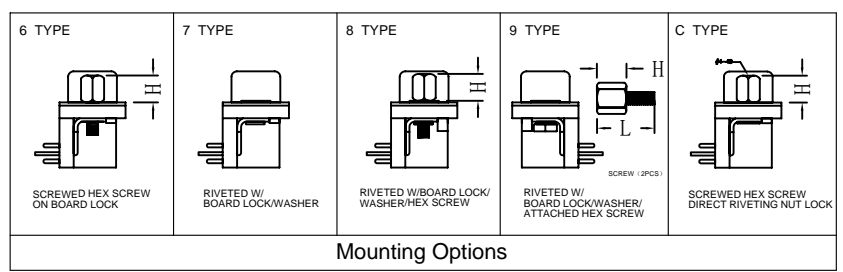

Mounting Options

JHJM 深圳市君灏精密工业有限公司
ShenZhen JunHao Exactitude Industry CO.,LTD

PART. NAME:	D型XX芯弯式PCB焊接插座(针)	TITLE:	D-SUB/DR/xxP/Male
PART. NO.:	SEE TABLE	DWG NAME:	C-SUB-DR0M-0001
APPROVED BY:	CHECKED BY:	DESIGNED BY:	DRAWN BY:
Jonsson	Jeff	allan	Jacky
CUSTOM NO.:		Tolerance	
		x.	±0.50
		x.x	±0.30
		x.xx	±0.20
REVISION:A2		xx° ±1°	

UNITS: mm
SCALE:
2019.01.23