

SIGN	DATE	DESCRIPTION	APPROVER
▲	180529	Changed E&F	Jacky
▲	190124	Add Nextron logo on nut post height	Jacky LIU


SPECIFICATIONS:

Current rating:3.0A AC/DC
Voltage rating:250V AC/DC
Contact resistance:30m ohm MAX
Insulation resistance:1000M ohm MIN
Withstanding voltage:1000V AC for one minute
Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH


Insulator:PBT+30%G.F(UL94V-0)
Contact:Copper Alloy Nickel Undercoated
Selective Gold Plated
Finish:Metal Iron With Tin Plated

Ordering Information

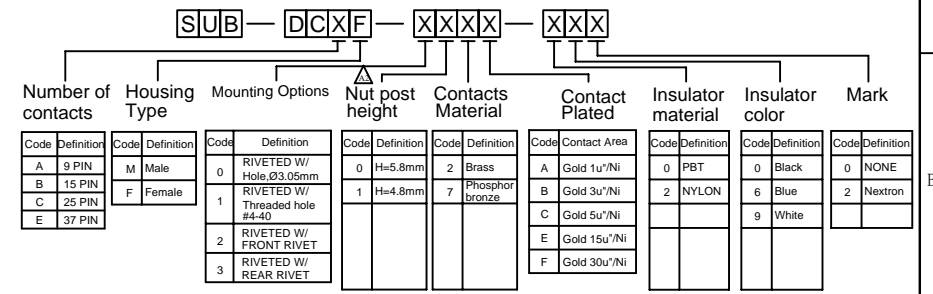

37P	54.83	63.50	69.32	49.86	45.72
25P	38.38	47.04	53.04	33.24	30.48
15P	24.66	33.32	39.14	19.39	17.78
9P	16.33	24.99	30.81	11.08	10.16
POS. NO.	A	B	C	E	F

DIMENSION

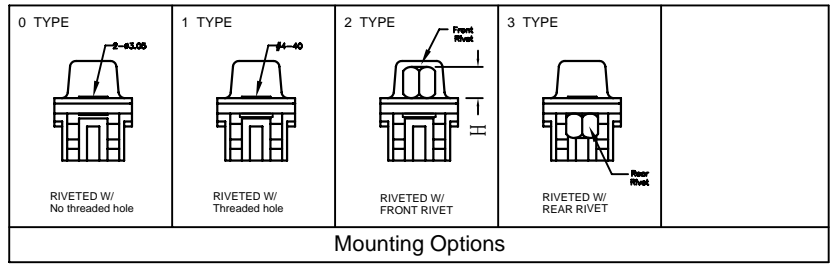

JHJM 深圳市君灏精密工业有限公司
SHENZHEN JUNHAO ENGINEERING CO., LTD

PART. NAME: D型芯压接式插座(孔)	TITLE: D-SUB/DICD/xxP/Female				
PART. NO.: SEE TABLE	DWG NAME: C-SUB-DC0F-0001				
APPROVED BY: Jonnson	CHECKED BY: Jeff	DESIGNED BY: allan	DRAWN BY: Jacky	CUSTOM NO.:	Tolerance
				UNITS: mm	x. ±0.50
				SCALE:	x.x ±0.30
				REVISION:A2	x.xx ±0.20
					xx° ±1°

