REV.	ECN NO.	APPD	DATE
A0	RELEASE	Jeff Zhou	11.02'09

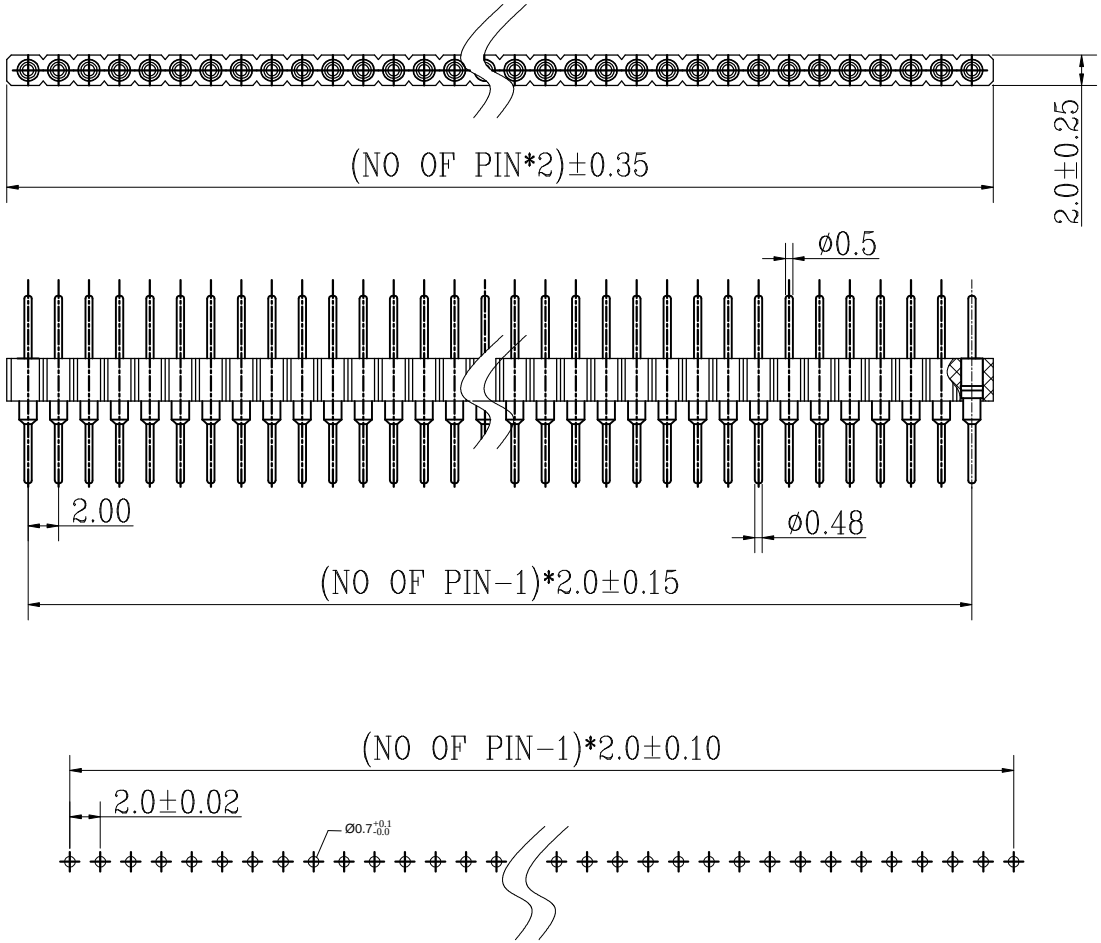

P.C.Board Layout





Pin detail

Material
- Pin: Brass,machined.
- Plating(Pin): Ni:80u" Au:1u".
- Plastic: PPS (UL 94 V-0) Black

Electrical
- Current rating:3Amps/Contact max.
- lnsulation: > 1,000MΩ at=100V.
- resistance: < 30mΩ.

Mechanical
- temperature: -40° to125° .

Ordeing Information

1 2 6 - X - X X X X - X X X X - X X X

表面处理		Pin长		间距（PITCH）		Pin形状	
代码	说明	代码	说明	代码	说明	代码	说明
1	单面	01-40	单排	5	2.0mm	0	直针
2	双面	02-80	双排				

本体塑料长度与本体宽度			
塑料长度/宽度	12.1mm	12.33mm	16.00mm
镀锡Sn:200u"	8211	8231	6201
Gold flash	8212	8232	6202
镀金Au:10u"	8213	8233	6203

塑料强度		绝缘材料		颜色	
代码	说明	代码	材料	代码	说明
2	2.0mm	1	PPS	0	neutron
		2	PBT	1	C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JUNHAO ENGINEERING CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JUN HAO ENGINEERING CO.,LTD

X ±0.5	UNITS mm	NAME: XX芯2.0mm间距单排圆针/12.33mm	
.X ±0.25			
.XX±0.10	MAT'L	PART NO.: 126-1-XX50-8232-21X	
.XXX±0.05	FINISH	APPD:	
.X° ±2°		CHKD:	
		DR: Jeff Zhou 11.02'09	

深圳市君灏精密工业有限公司
SHENZHEN JUNHAO ENGINEERING CO.,LTD

TITLE: XX芯2.0mm间距单(双)排圆针

DWG NO.: EP-C-126-601

SCALE	SHEET	REV.
1:1	1/1	A0