



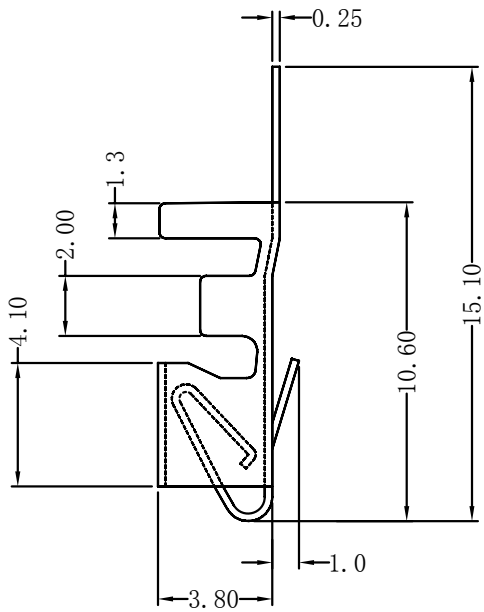



REV.	ECN NO.	APPD	DATE
AO		wang	09.08.07

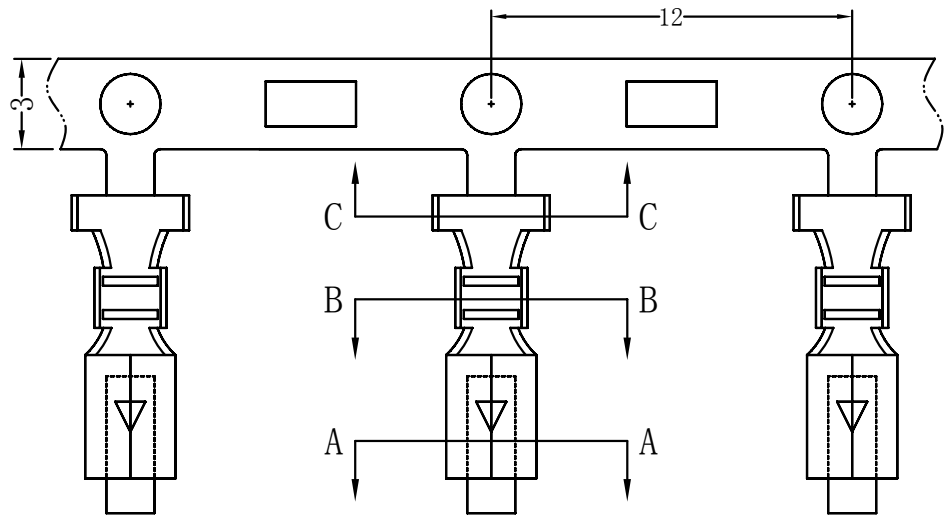

B — B



C — C



A — A

- SPECIFICATIONS:
- \*Pitch between poles : 3.96mm
  - \*Current rating : 7.0 A AC/DC
  - \*Voltage rating : 250V AC/DC
  - \*Contact resistance : 20m ohm. max
  - \*Insulation Resistance: 1000 Ω min
  - \*Withstanding Voltage : 1500V AC for one minute
  - \*Contact Material : Copper Alloy
  - \*Contact Plating : Tin-plated
  - \*Operating Temperature: -25° C to 85° C
  - \* Applicable Wire : AWG #18 to #22

X ±0.50	UNITS M M	NAME: 压接头端子	JHM 深圳市君灏精密工业有限公司 SHENZHEN JUNHAO ENGINEERING CO.,LTD
.X ±0.40	MAT'L	PART NO. : P-24T-0000-000-077	
.XX±0.30	FINISH	APPD: <i>SHOU</i>	TITLE: 压接头2114T(簧片)端子
.X° ±2°		CHKD: <i>WZK</i>	DWG NO. : EP-P-24T-3960-0141
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JUNHAO ENGINEERING CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JUN HAO ENGINEERING CO., LTD.			DR: <i>WANG</i>
			SCALE 1:1
			SHEET 1/1
			REV. AO