

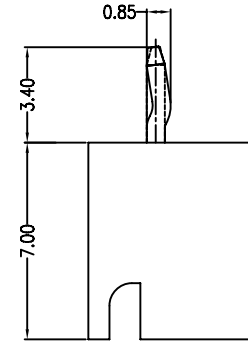
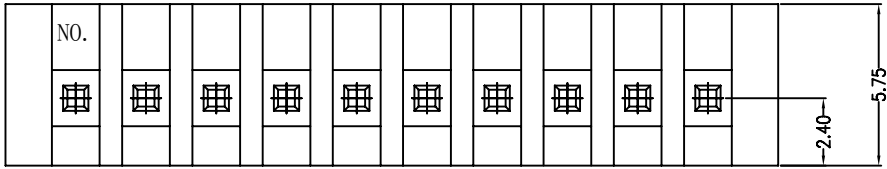


REV.	ECN NO.	APPD	DATE
A0		Wang	11/03/11

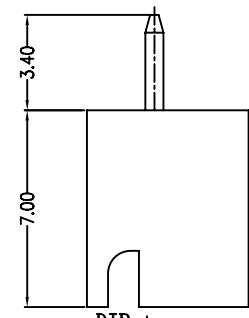

"K" type

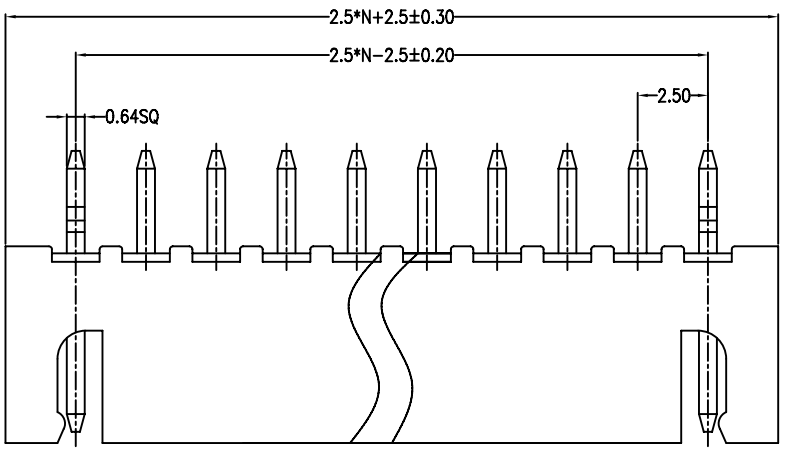

DIP type

SPECIFICATIONS:

- Current rating : 3.0 A AC/DC
- Voltage rating : 250V AC/DC
- Contact Resistance : 20mΩ max
- Insulation Resistance: 1000MΩ min
- Withstanding Voltage : 800V AC for one minute
- Operating Temperature: -25° C to +85° C
- Insulator Material : PA 66 UL94V-0
- Contact Material : Copper Alloy
- Contact Plating : Matte Tin

Ordering Information:

23T-OXX0-0107-290

Code	PIN	Code	Definition	Code	Plating	Code	Insulator Material	Code	Definition
03	03	0	DIP type	1	Au: G/F	2	PA66	0	Black
04	04	S	DIP "K" type	7	Tin	1	LCP	9	White/Natural
06	06			8	Matte Tin				
08	08								
10	10								
12	12								

X ±0.50	UNITS	NAME:	深圳市君灏精密工业有限公司 SHENZHEN JUNHAD ENGINEERING CO.,LTD						
	M M	2.5WF 2317SJ-XX Pin							
.X ±0.35	MAT'L	PART NO.:	TITLE:						
		23T-OXX0-0107-290	2.5WF 2317SJ-XX Pin						
.XX ±0.25	FINISH	APPD:	DWG NO.:						
		CS	EP-C-23T-2500-0174						
.X° ±2°		CHKD:	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A0</td> </tr> </table>	SCALE	SHEET	REV.	1:1	1/1	A0
		SCALE		SHEET	REV.				
1:1	1/1	A0							
		DR:							
		W.L.W.S							

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JUNHAD ENGINEERING CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JUN HAO ENGINEERING CO., LTD.