


Table (1)

Code	Definition
1	Gold/Flash
2	Gold 1.0~2μm

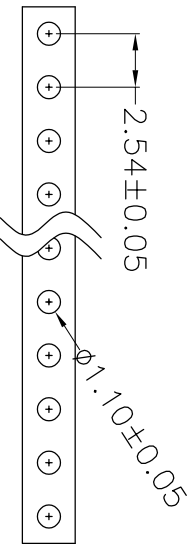

PCB LAYOUT

NOTES:

1. MATERIALS:

- 1-1. Insulator: Polyester UL94V-0.
- 1-2. Contact: Brass.
- 1-3. Plated: Plated (see table) OVER Ni.

2. ELECTRICAL CHARACTERISTICS:

- 2-1. Current Rating: 3 Amp.
- 2-2. Voltage Rating: 250V AC/DC.
- 2-3. Contact Resistance: 20 mOhms MAX.
- 2-4. Insulation Resistance: 1000 MOhms MIN.
- 2-5. Withstanding Voltage: 500V AC/MINUTE.
- 2-6. Operation Temperature: -40° C~+105° C.

Part NO.

211-\*\*\*2\*-\*02\*-\*\*\*

- 0: 无
- 1: nexttron

NO. Of Positions  
02~40

Contact length

Dim "A" X "B"

- 1: 3.0x6.0
- 2: 2.4x6.0
- 6: 3.2x5.84
- B: 3.0x8.0
- D: 3.0x3.0
- L: 3.2x7.0
- Y: 3.5x3.5

R/A Height

Dim "C"

- 1: 0.32
- 2: 1.0
- 3: 2.54
- 4: 1.70
- 7: 1.30
- 8: 1.50

See Table (1)

- Housing Material
- 0: PBT 4: PA 6T

- Housing Color
- 0: BLACK 9: WHITE

X ±0.5	UNITS	MM	NAME:	2.54mm PIN HEADER Right Angle
	.X ±0.38	MAT'L	PART NO.:	SEE TABLE
.XX ±0.25	FINISH	APPD:	jeff	09/1725
.XXX ±0.08		CHKD:	jeff	09/1725
.X' ±2		DR:	niezhenqi	09/1725

深圳市君瀚精密工业有限公司  
SHENZHEN JUNHAO ENGINEERING CO., LTD

TITLE:

2.54mm PIN HEADER Single row Right Angle(Solder)

DWG NO.: EP-C-211-0010-0137

SCALE SHEET REV.  
1:1 1/1 A1

REV.	EON NO.	APPD	DATE
A0	RELEASE	niezhenqi	09/19/13
A1	电镀规格更新	niezhenqi	09/1725