


Table (1)

Code	Definition
1	Gold/Flash
2	Gold 1.0~2u"

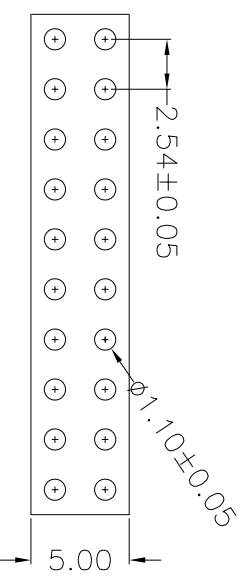

PCB LAYOUT

NOTES:

1. MATERIALS:

- 1-1. INSULATOR: Polyester UL94V-0.
- 1-2. CONTACT: BRASS.
- 1-3. PLATED: CONTACT GOLD PLATED OVER Ni.

2. ELECTRICAL CHARACTERISTICS:

- 2-1. CURRENT RATING: 3 Amp.
- 2-2. VOLTAGE RATING: 250V AC/DC.
- 2-3. CONTACT RESISTANCE: 20 mohms MAX.
- 2-4. INSULATION RESISTANCE: 1000 MOhms MIN.
- 2-5. WITHSTANDING VOLTAGE: 500V AC/MINUTE.
- 2-6. Operation Temperature: -40° C~+105° C.

Part NO.

213--2*-*02*-****

- NO. Of Positions: 04~80
- Contact length: R/A Hight
- Dim "A" X "B": Dim "C"
- 1: 3. 0x6. 0
- 2: 2. 4x6. 0
- 3: 4. 5x6. 0
- 5: 3. 0x4. 5
- 7: 3. 2x5. 84
- 8: 3. 0x10. 0
- W: 3. 0x3. 0
- A: 3. 0x3. 5
- D: 3. 8
- 唛头: 0:无
- 1:nexttron
- Housing Color: 0:BLACK 9:WHITE
- Housing Material: 0:PBT 4:PA6T
- Plated: See Table (1)

X ±0.5	UNITS	mm	NAME:	2.54mm Pin Header Double Row
X ±0.38	MAT'L		PART NO.:	213-**-2*-*02*-**
.XX±0.25	FINISH		APPD:	jeff
.XXX±0.08			CHKD:	jeff
X' ±2"			DR:	niezhengqi
				09/17'25
深圳市君瀚精密工业有限公司 SHENZHEN JUNHAO ENGINEERING CO., LTD TITLE: 2.54mm Pin Header Double Row R/A Type(Solder) DWG NO.: EP-C-213-0020-0141 SCALE: 1:1 SHEET: 1/1 REV: A1				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JUNHAO ENGINEERING CO., LTD. AND SHALL BE KEPT CONFIDENTIAL OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JUN HAO ENGINEERING CO.,LTD