

REV.	ECN NO.	APPD	DATE
A0	RELEASE	Cheng	09/28/08
A1	图面更新	niezhengqi	09/08/13
A2	电规规格更新	niezhengqi	09/17/25

NOTES:
 1. MATERIALS:
 1-1. INSULATOR: Polyester UL94V-0.
 1-2. CONTACT: BRASS SQ 0.5mm.
 1-3. PLATED: CONTACT GOLD PLATED OVER Ni.

2. ELECTRICAL CHARACTERISTICS:
 2-1. CURRENT RATING: 1.0 Amp.
 2-2. VOLTAGE RATING: 250V AC/DC.
 2-3. CONTACT RESISTANCE: 20 mOhms MAX.
 2-4. INSULATION RESISTANCE: 1000 MOhms MIN.
 2-5. WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 2-6. Operation Temperature: -40° C~+105° C.


Part NO.

208-***1*-002*-***
 1:nexttron

NO. OF Positions: 02~40
 Contact length: Dim "A" X "B"
 1: 2.8x4.0
 Plated: Housing Material
 4: PA6T

Code	Definition
1	Gold Flash
2	Gold 1.0~2u"

See Table (1)

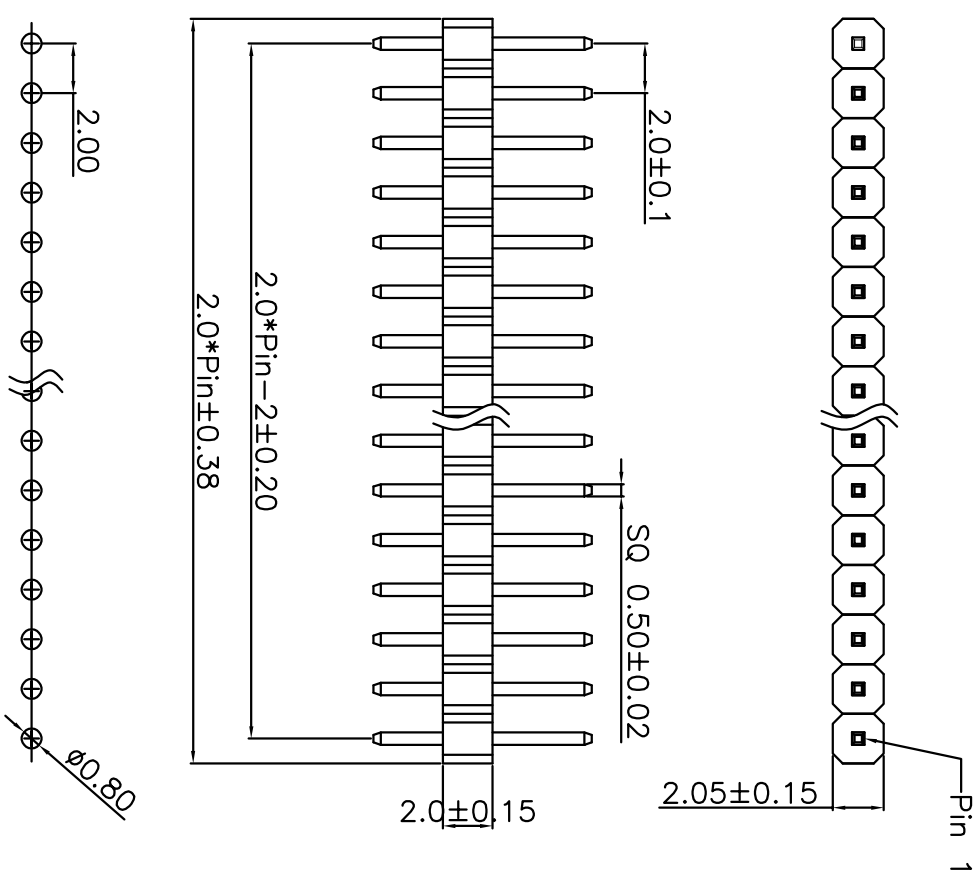

PCB LAYOUT

NAME:		UNITS	
2.0 Pinheader Single Row Straight Type		X ±0.5	mm
PART NO.:		.X ±0.30	
208-***1*-002*-***		.XX ±0.20	MAT'L
APPD: jeff		.XXX ±0.10	FINISH
CHKD: jeff		.X ±2	
DR: niezhengqi		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JINHAO ENGINEERING CO., LTD. ANY REUSE OR REPRODUCTION OF ANY PART THEREOF WITHOUT THE WRITTEN CONSENT OF JIN HAO ENGINEERING CO.,LTD.	
TITLE:		09/17/25	
2.0 Pin Header Single Row		09/17/25	
DWG NO.:		09/17/25	
EP-C-208-0010-0131			
SCALE			
1:1			
SHEET			
1/1			
REV.			
A2			

深圳市君瀚精密工业有限公司
 SHENZHEN JUNHAO ENGINEERING CO., LTD

